

Here's the Carlson

MINI2


Designed to boost productivity and speed,
with extra-bright screen, long-lasting
battery, and improved GPS technology to
perform better in natural surroundings

- Extra large 800x450 TFT display for easy viewing of survey data
- Fast 1.0 GHz processor
- Scratch-resistant, touch-screen display, highly readable in both low light and glaring sunshine
- 3.6" w x 7.25" h x 1.5" deep
- Weighs just 1.3 lbs
- Dustproof and waterproof rating of IP68
- Meets MIL-STD-810G standard
- Options include an integrated 3G modem, 5 mega-pixel camera, or GPS/GNSS module

The **Carlson MINI2** comes with either **Carlson SurvCE**, the world's most popular data collection software...

or the new **Carlson GIS360**, which incorporates both GIS & surveying workflows to collect data in the field...

or, for accident and crime reconstruction, **Carlson CSI Mobile**.

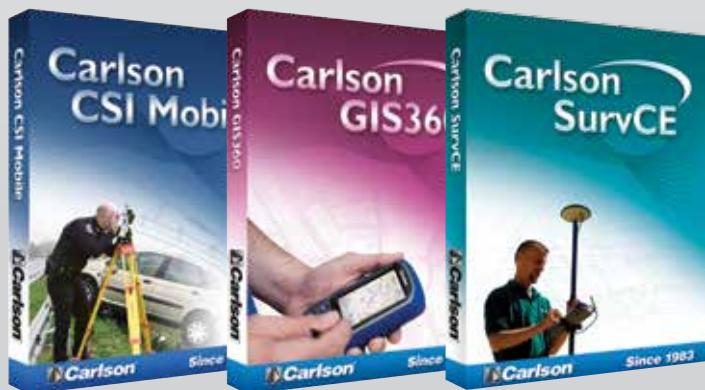

For more info or to locate a dealer near you-

call - +31 (0) 36 750 1781

www.carlsonsw.com

www.carlsonEMEA.com



Carlson

Europe ■ Middle East ■ Africa

Markerkant 1338 | 1314 AN Almere | The Netherlands

Carlson MINI2 Specifications

The Carlson MINI2 is built for the field. It is waterproof and dustproof (IP68) featuring long battery life, sunlight readable display, and operation under extreme temperatures.

PROCESSOR

- 1.0GHz ARM Cortex A8 i.MX53 processor

OPERATING SYSTEM AND SOFTWARE

- Microsoft® Windows Embedded Handheld 6.5.3
- Microsoft Office Mobile 2010* (Word Mobile, Excel Mobile, PowerPoint Mobile, Outlook Mobile)
- Multiple languages (English, French, Spanish, German, Portuguese)

MEMORY AND DATA STORAGE

- 512MB RAM
- 8GB flash storage
- User-accessible micro SD/SDHC slot

DISPLAY

- Active viewing area: 4.3" (109 mm) WVGA LCD TFT (800x480)
- High visibility backlit LCD
- Portrait or landscape orientation

TOUCH SCREEN

- Projected capacitive touch interface "optically bonded" to display for increased visibility
- Chemically-strengthened glass

KEYBOARD

- Adjustable LED backlit keys
- Five-way directional keypad
- Numeric keypad (6 user reassignable)
- OEM configurable/customizable

PORTS

- COM1, RS-232C 9-pin D connector with 5VDC power output
- USB host (Full A), USB client (Micro B)
- 12, 24VDC @ 1.5-3.5A, 10-36V unregulated
- 3.5 mm audio jack, supports speaker/microphone or stereo output (pin detect)
- I/O module OEM configurable/customizable



BATTERY

- Intelligent Li-Ion battery 3.6VDC @ 10600mAh, 38.16Whr
- Operates for up to 10 hours on one charge
- Charges in 2 to 4 hours
- Battery easily changeable in field
- Optimized for excellent performance in cold temperatures

PHYSICAL

- Size, Standard models: 3.6" w x 7.25" l x 1.5" d (91 x 184 x 38 mm)
- Weight: 1.3 lbs (590 g)
- Durable hardened plastic in a shear-proof and shock-resistant design
- Strong chemical resistance
- Comfortable, wide hand strap
- Easy-to-grip, impact-absorbing bumpers

EXTREME ENVIRONMENTAL CONDITIONS

- IP68 waterproof and dustproof
 - Operating temperature: -22F to 131F (-30C to 55C)
 - Storage temperature: -22F to 158F (-30C to 70C)
- Note: Bluetooth® wireless technology is rated to -4F (-20C)
- Shockproof: multiple drops from 4'-5' (1.2-1.5 m) onto concrete
 - MIL-STD-810G test procedures: Method 500.5 Low Pressure (Altitude); Method 501.5 High Temperature; Method 502.5 Low Temperature; Method 503.5 Temperature Shock; Method 506.5 Rain; Method 507.5 Humidity; Method 510.5 Sand and Dust; Method 512.5 Immersion; Method 514.6 Vibration; Method 516.6 Shock

WIRELESS CONNECTIVITY OPTIONS

- Bluetooth® wireless technology, 2.1 +EDR, Class 1.5, range 100 feet (30 m)
- Wi-Fi 802.11b/g/n with extended range
- 3.75G modem - Pentaband Worldwide (Geo 3G model only)
- Frequencies: HSPA+/UMTS: 800/850/900/1800/1900/2100 MHz (Supports micro-SIM card only)
- Data communication interface, SMS

CAMERA (GEO MODELS):

- 5MP resolution with autofocus and LED Illuminator + video capture



GPS/GNSS (GEO MODELS):

- 2 to 5 meter typical accuracy with postprocessing capability for better accuracy
- Enhanced performance under heavy canopy
- GPS, GLONASS, GALILEO, COMPASS, SBAS L1
- Integrated real-time SBAS receiver (WAAS, EGNOS, etc.)
- 32 GNSS tracking channels

BARCODE 1D/2D IMAGER (BC MODELS)

- Built-in barcode imager and decoder
- Symbologies: all common 1D and 2D (PDF 417, MicroPDF417, Composite, RSS, TLC-39, Data matrix, QR code, Micro QR code, Aztec, MaxiCode, Postal codes, etc.)
- Programmable trigger buttons
- Visible aiming crosshair with low light illumination
- Barcode Connector™ Utility, wedge and configuration, SDK support available

CERTIFICATIONS AND STANDARDS

- FCC Class B
- CE Marking (applicable EMC, R&TTE, and LVD directives)
- Industry Canada
- EN60950 Safety
- RoHS Compliant

STANDARD ACCESSORIES

- 10600mAh battery
- AC wall charger with international plug kit
- Micro USB client sync cable
- Quick Start Guide
- Ultra-wide hand strap
- Shipping box
- Screwdriver



Carlson
www.carlsonsw.com

CARLSON SOFTWARE
102 West Second Street
Maysville, KY 41056
800-989-5028 (US Toll Free)
606-564-5028 (p)
606-564-6422 (f)

info@carlsonsw.com
www.carlsonsw.com



Carlson
Europe ■ Middle East ■ Africa

International Offices
Carlson EMEA

Markerkant 1338
1314 AN Almere
The Netherlands
+31 36 750 1781

EMEA@carlsonsw.com
www.carlsonemea.com